



The
Patent
Office

PCT/GB 99/00590

26 FEBRUARY 1999
INVESTOR IN PEOPLE

GB99/590

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP9

RH
REC'D 22 APR 1999

WIPO PCT

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

G D Court.
25th March 1999



£25

10AUG98 5382000-8 000192
P01/7700 25.00 - 9817297.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form))

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

N.75180 JGL/JLM

2. Pat
(The

9817297.6

-7 AUG 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Formula One Administration Limited
14/16 Great Portland Street
London
W1N 6BL

Patents ADP number (*if you know it*)

73923 50001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom



4. Title of the invention

DATA COMMUNICATION SYSTEM

5. Name of your agent (*if you have one*)

J A KEMP & CO

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

14 SOUTH SQUARE
GRAY'S INN
LONDON WC1R 5LX

Patents ADP number (*if you know it*)

26001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

GB

9804730.1

5 March 1998

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body:
- See note (d))

Patents Form 1/77


9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 25

Claim(s) 5

Abstract 1

Drawing(s) 10 + 10 

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application

Signature

J.A. KEMP & CO.

Date 7 August 1998

12.

Name and daytime telephone number of person to contact in the United Kingdom

Mr. J. L. Midgley
0171 405 3292

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue of a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DATA COMMUNICATION SYSTEM

This invention relates to a system for transmitting
5 data, particularly audio and video signal data, to and from
a moving object.

In order to provide real time communication of audio,
video and data signals between a moving vehicle and a fixed
ground station, the vehicle may be provided with an antenna
10 for beaming a signal to a helicopter located above the car.
The helicopter then relays the signal from the car to and
from a fixed ground station. This system of communicating
data between a moving vehicle and a fixed ground station
has been particularly useful in the field of motor racing
15 to provide video, audio and data signals from the cars and
to allow data and audio signals to be transmitted back to
the car.

Current on-board cameras use a microwave transmitter
system for communication up to the helicopter. The
20 helicopter then re-transmits a signal on a second microwave
frequency to the fixed location.

There are a number of drawbacks associated with such a
system. If a car that is providing the signal does not
have a direct line of sight to the helicopter, for example
25 because of tall trees or buildings at the side of the
track, then the received signal may be weak or obscured
completely. In such a situation, it is necessary for the
helicopter to remain almost directly above the vehicle to
maintain a consistent contact with the car. This can be

difficult, particularly with high-speed racing such as Formula One where the helicopter is unable to match the speed of the cars it is attempting to follow.

Alternatively, the helicopter can fly at a greater height 5 to avoid objects coming between it and the car. However, this again can reduce the signal quality received by the helicopter due to the increased distance. This can also lead to problems with air traffic control. A further problem of using a helicopter to relay signals is its 10 dependence upon the weather. If the weather becomes unsuitable for flight then it is not possible to provide the signal relaying function at all.

A further limitation of the use of helicopters for relaying signals is the limited amount of weight that can 15 be carried to allow the helicopter to remain at its station for the duration of a race. Similarly, there is a limitation on the amount of power that can be provided for running the radio frequency systems.

Therefore, according to the present invention there is 20 provided a communication system including:

a video signal source and transmitter for transmitting said video signal provided on a mobile object;

a plurality of receivers for receiving said transmitted video signal and

25 control means for selectively receiving the transmitted video signal received by one of said receivers and outputting said selected signal.

According to the present invention there is also

provided a method of communicating a video signal between a mobile object and a stationary location comprising transmitting the video signal from a transmitter on the mobile object;

5 receiving at said stationary location signals from a plurality of receivers; and

selecting one of the signals received by said receivers.

The present invention is preferably also arranged so
10 that switching between receivers is carried out on the basis of the position of the mobile object. The receivers are preferably arranged so that the area in which they can receive signals at an acceptable level overlaps with the receiver in the corresponding adjacent area.

15 The transmitters on the mobile object may be arranged to be able to transmit on a number of different frequencies. Similarly, the receivers may also be adapted to receive on a number of different frequencies. The operating frequencies of the transmitters and the receivers
20 are preferably controlled by data messages sent from a central location to the moving objects and receiver stations. Each frequency may be received by a dedicated antenna (i.e. each receiver having its own antenna) or a single antenna and an RF splitter may be used with a
25 proportion of the RF signal being directed to each receiver. The receiver selects the wanted frequency in the RF signal.

The video signal is preferably transmitted from the

mobile object to the receivers using a microwave carrier. This is preferably at 2.5 GHz. Other data and audio signals may be modulated onto the video signal or transmitted on a separate frequency, preferably between 100 5 MHz and 40 GHz.

The present invention requires only a single frequency to transmit a video signal as there is no re-transmission of the signal as in the case of a helicopter-based system. This allows a doubling in the number of signals that can be 10 transmitted for a given number of frequencies.

Furthermore, because the transmission from each transmitter is received by a receiver at relatively close range, the transmission power can be reduced. This also allows the same frequency to be used simultaneously between another 15 transmitter and receiver at a different location. This is not possible with helicopter based systems in which all signals have to go via the helicopter and so only one transmitter could use a given frequency in order to avoid interference.

20 By providing sufficient receivers to ensure that the signal transmitted is always received by at least one receiver there is never a break in transmission. As the signal is being transmitted substantially horizontally along the ground to a trackside receiver, trees and 25 buildings do not present an obstruction to the signal path.

The receivers are preferably provided in a track side receiver station. The station preferably includes an

antenna and optionally additional receivers.

A specific embodiment of the present invention will now be described by way of example with reference to the accompanying drawings in which: -

5 Figure 1 shows an example of a layout of receiver stations around a section of racetrack;

Figure 2 shows a representative arrangement of receiver stations relative to each other and the respective switching positions for switching from the receiver in one
10 station to the next;

Figure 3 shows a schematic layout of the arrangement of one of the receiver stations according to the present invention;

Figure 4 shows a schematic layout of the signal relay
15 system of an embodiment of the present invention;

Figure 5 shows a schematic example of a node used in the signal relay system; and

Figure 6 shows an example of the detection range of an antenna.

20 Figure 1 shows an example of a section of racetrack and a suitable arrangement of receiver stations (referred to herein as stations) around such a section of track to provide continuous reception of a video signal from an on-board camera in a racing car. The embodiment of the
25 present invention described herein relates to a system for providing communication of a video signal from a moving racing car to a fixed location such as an outside broadcast unit. Figure 1 shows a section of racetrack 1 with a

number of stations 2 arranged at appropriate locations around the track. Each station includes at least one antenna and one receiver. This may be a directional antenna (e.g. helix antenna) or an omnidirectional antenna.

5 The dashed lines in Figure 1 provide an indication of the detection angle of the antenna on each station.

The signal received by the antenna is fed to the receiver in the station and then fed back to a controller at a central location where the signal from one of the

10 receivers is selected as the most appropriate. The selected signal is then used to provide the output signal from the system, e.g. for broadcast.

It will be apparent that, by providing sufficient stations around the periphery of the track, as the car

15 travels around the track the video signal transmitted by the car is always receivable by at least one of the stations.

In order to ensure this continuity of reception, there is some overlap in the detection range of one station and

20 its neighbour. This overlap (preferably at least 20m) ensures that as the car travels from the reception area of one station to the reception area of the next station, the car passes through an area where the video signal transmitted by the car is received by the antennas of both

25 stations. At some point in this area, the system switches from using the signal from the first station to using the signal from the next station.

Figure 2 shows a schematic view of a section of a

track showing the antennas (A_2 , A_3 , A_4 , etc.) of a number of stations. As the car enters from the right, it first passes position P_1 . The antenna A_2 is initially receiving the signal transmitted by the car. As the car continues to the point P_2 , the car enters the reception range of the next antenna A_3 at which point the signal being output is received by A_3 as well as by A_2 . However, the signal being received by A_2 is still the one being utilised to provide the output signal. As the car passes position P_3 , the system switches from using the signal from A_2 to using the signal from A_3 although the signal from the car is still being received by A_2 . As the car continues on through position P_4 , antenna A_2 eventually becomes unable to receive the signal from the car so that only antenna A_3 is receiving the signal. This switching procedure is repeated as the car progresses around the track and moves from the reception area of one station to the next. As is clear from figure 2 switching takes place at a distance D_2 , D_3 or D_4 before the car reaches the antenna of the station currently providing the video signal which is being utilised. This ensures that a good quality signal is still being received up until the changeover. If the changeover was delayed until the car was level with the antenna, the signal strength received by the antenna may drop off considerably as the car drops out of the optimum reception zone of the antenna.

The exact point at which switching takes place is very important. If switching occurs too early, e.g. at P_2 , the

strength of the signal received by A_3 may be weak. As described above, leaving switching until too late can result in the signal received by A_2 being too weak. If the received signal is weak then the output signal may be
5 distorted or noisy. However, to determine the appropriate switching point it is not sufficient to simply measure the strength of the signal received by each receiver and then select the strongest of those. This can lead to a misleading indication of the best signal and hence the
10 wrong switching position. One of the reasons for this is interference caused by the transmitted signal arriving at the antenna indirectly, i.e. having reflected off some other object. This phenomenon, known as multipath, results in the direct and indirect signals having taken paths of
15 different lengths to arrive at the receiver. Depending upon the difference in the path lengths, the two signals may constructively interfere, providing a stronger signal, or destructively interfere reducing the signal strength. Furthermore, as the car moves, this difference between the
20 path lengths may change and so the signal strength may vary between being very weak and being very strong. This variation makes it difficult to use the signal strength as an accurate indicator of which receiver to use for the output signal.

25 The system of this invention determines the appropriate time to change from one receiver to the next based upon the position of the car relative to the antenna. This requires knowledge of the position of the stations and

the car. This can be determined in a number of ways. On a racetrack, data may be available from the time keeping system. This allows the position of the cars to be determined accurately at any time. However, there are a number of alternative ways of determining position. Apart from well-known systems such as GPS (Global Positioning System), it would be possible to use a custom system for providing position information, for example by utilising the stations themselves to determine the distance from the car. Even where highly accurate position information is not available, it is still possible interpolate to provide an estimated position. In a racing track situation, the cars follow a fairly predictable position and speed paths, allowing accurate estimation of the car's position.

On a racetrack, which may be several kilometres long, the stations may be a long way away from each other and from the controller at the central location. The simplest way of delivering the signals received by the receivers to the central controller is by directly connecting, e.g. via a cable, each receiver to the controller.

In a motor race, it is desirable to have cameras on more than one car. The system can enable a number of cars to provide video signals, by each car transmitting on a different frequency. Where two or more cars are in the reception area of the same station, the antenna receives both signals.

This system can be further developed to allow for additional cameras where the number of frequencies

available for transmission is limited or if there are a large number of cars in a race. Furthermore it may be desired to have more than one signal being produced from each car (e.g. forward and rearward views). Under such
5 circumstances a large number of channels may be required. If the bandwidth available is limited, it is possible to utilise the same frequency for signals provided by different cars. This is possible so long as cars transmitting on the same frequency are sufficiently far
10 apart such that the station picking up the signal from one car does not pick up a significant amount of the signal from another car transmitting on the same frequency. This can be achieved by monitoring the position of the cars and where two cars using the same frequency are in danger of
15 coming close enough to interfere with each other the controller will instruct the transmitter on the car to change to a different frequency which is not being used by any other car in close proximity or to stop transmitting. The position information used to determine switching
20 between stations may be used to determine the allocation of frequencies to the transmitters. In this way, several cars at different positions around the track can use the same frequency simultaneously. This represents a considerable advantage over the helicopter-based system that could only
25 utilise a single transmitter per frequency. Furthermore with the present invention each transmitter only uses a single frequency rather than the two required with the helicopter system, i.e. one for transmitting to the

helicopter and one for the relay to the ground based receiver.

Having a separate connection between each receiver and the central controller leads to a large number of
5 potentially very long cables between the receivers and the central controller. Therefore, in an alternative embodiment of the present invention there is provided a common "bus" system to which all receivers are attached. In its simplest form, this comprises two connections an A-
10 line and a B-line, each line being capable of carrying a video signal. These two lines are arranged to connect the central location and each of a number of nodes. However, instead of the line going from the central location to each node, the lines connect from the central location to the
15 first node and then from the first node to the second node and so on until the last node which is preferably connected back to the central location to form a ring. Each receiver may have its own node or a node may be provided for more than one receiver. For example, for a set up comprising
20 twenty receivers, five nodes may be provided with four receivers connected directly to each node.

Figure 5 shows an example of a node to which two receivers in two stations receiving the signals provided by antennas A_2 and A_3 , are connected. As is shown
25 schematically in Figure 5, signals from each receiver can be connected either to the A-line, the B-line or to neither line (NC). Referring to Figure 2, as the car arrives at the position P_1 the signal transmitted by the car is being

received by a A_2 which, as is shown in Figure 5, is connected to the A-line. The received signal is then passed back down the line from node to node until the signal is received at the central location. As the car continues on past P_2 , the signal transmitted to the car is then receivable by A_3 and the switch in the node connects the signal provided from the receiver for antenna 3 to the B-line. The received signal from A_3 is then passed from node to node down the B-line, again back to the central location. Thus, between positions P_2 and P_4 the central location is provided with two video signals corresponding to the signals received at antennas A_2 and A_3 . As shown in Figure 4, the central location is provided with switching means. The switching means outputs the video signal provided on the A- or the B-lines according to a control signal provided by a controller. In this embodiment the control signal comprises data messages sent from control software operating on a computer. The software selects which of the video signals on the A-Line and B-Line is output. Therefore, initially, the software controls the switch to provide an output signal from the A-Line, then as the car passes point P_3 , the software sends a message to the switcher so the output corresponds to the signal being received on the B-Line (i.e. that received by antenna A_3).

25 Two synchronisers are employed to ensure the sync pulses of the video signals on the A-Line and B-Line are coincident. When a switch command is sent, the switcher waits until the next vertical interval of the current video

signal and then switches between the A-Line and the B-Line, or vice versa. In order to avoid image distortion, such as frame roll, when switching between the signals output by one receiver and the next, a frame memory may be employed.

5 The use of a frame memory avoids any problems due to the frames in the two signals not being synchronised.

As the car continues on, the signal from A_2 will be lost. Then as the car comes within the range of A_4 , the node to which A_2 is connected will disconnect A_2 from the
10 A-line and the node to which A_4 is connected will connect the signal received by A_4 to the A-line so that both the A-line and the B-line are relaying signals received from the car. Again, at the appropriate time, the software sends a message to the switcher in the central location to switch
15 from outputting the signal on the B-Line to outputting the signal on the A-Line (which corresponds to the signal received by A_4). This process is repeated as the car continues around the track with the A-line and B-line alternatively providing the output signal. The exact
20 timing of the disconnection of one receiver (e.g. A_2) and the connection of the next receiver to the same line (eg A_4) is not essential as long as the signal on that line is not being utilised. For example, the disconnection of A_2 from the A-line may be as soon as the signal received by A_2
25 is too weak or it may be delayed until the time at which the signal from A_4 is sufficiently strong.

Figure 5 indicates that once the RF signal has been received it is converted back to a baseband video signal.

The A-Line and the B-Line are therefore independent of the received frequency and hence can be used to provide transmission of video signals from more than one car.

However, the A/B Line pair are only capable of transmitting
5 the two video signals required when following a single car around the track. Thus, in order to make use of the possibility of following two different around the track, a separate pair of lines e.g. a C-Line and D-Line can be provided.

10 Again, because the C/D-Line pair are independent of frequency they can be used in the transmission of video pictures from a car transmitting on any frequency within a specified receiving band. The second car may be transmitting on the same frequency as the car being
15 followed by the A/B-Line pair. However the cars are required to be at different locations around the circuit so that the RF signals reaching the receiver from the two cars do not interfere with each other.

Thus the addition of extra Line pairs allows an
20 increase in the system capacity by one car. Further pairs (E/F-Line) may also be added to allow third and further cars to be followed around the track. It is however, still possible to have several cars transmitting at the same time around the track without having a second (C/D-Line) system.
25 It is however only possible to relay the signal from one of those cars at a time with the signals received by other antennas from other cars not being connected to the A or B-Lines.

Alternatively, if two cars using the same frequency become too close to each other on the track then one of these cars could be sent a message to change its transmission frequency, thus avoiding interference.

5 In an alternative embodiment of the present invention the receivers may be connected to a network (e.g. LAN). The network may link all the receivers or just a proportion of them in conjunction with other networks. In this way, the central controller can instruct which receivers should
10 send their received signals.

The layout of the receiver stations around the track requires careful planning to provide the required coverage with the optimum number of stations. In theory it would be possible to simply place a large number of stations at
15 regular intervals around the track to ensure that the signal transmitted by the car can be detected by at least one of them at all positions on the track. However, such a layout introduces other problems into the system. If stations are placed too close together then, apart from the
20 unnecessary additional cost of having more stations than necessary, the complexity of the switching and controlling system is increased because the signal from a transmitter may be picked up by several antennas. Equally having too few base stations may leave areas of the track where only a
25 poor quality or no signal can be received. Therefore, in order to achieve consistent coverage of the entirety of the track, with the minimum number of receivers, the receiver stations are laid out as follows.

A typical helix antenna provides a detection area (or receive envelope) which is a 30° segment of a circle with a maximum range of around 200 metres. A receive envelope cut off area is between 30 and 60 metres depending on the height of the antenna above the ground (between 1.5 metres and 3 metres respectively).

The 30° segment of a circle is described as the beamwidth of the antenna and is a specification supplied by the antenna manufacturer. The maximum range is determined by the maximum distance at which the received power level is sufficiently high to produce broadcast quality video signal. The minimum receive power level used for broadcast quality pictures is -60dB.

The receive envelope cut off area is the distance in front of the antenna at which the video signal breaks up. The break up in the video picture is caused by a drop in the received power level resulting from cancelling of the direct signal by a reflection of the same signal off the ground. The distance at which this occurs is dependant on the height of the transmit antenna and the height of the receive antenna above the ground. The frequency of the RF signal will also change the location of the cut off point. The amount of reflection and hence its effect depends on the surface over which the wave is travelling as well as upon the wavelength of the signal. The following reflection equation can be derived:

$$\text{Received Power} = 4P \sin^2 \left(\frac{2\pi h_r h_t}{\lambda d} \right)$$

Where P is the received power without reflection i.e. under free space conditions, h_r and h_t are receiver and transmitter heights relative to the reflection surface and d is the distance between the receiver and transmitter.

The reflection surface may not be the ground. For instance it may be a wall or barrier. In this case the values h_r and h_t refer to the distance between the reflection surface and the respective antennas.

10 Analysis of the reflection equation indicates that to maximise the receive envelope close to the antenna, it is preferable to mount the antenna low to the ground. However, the RF signal is attenuated as the antenna becomes closer to the ground which reduces the maximum distance of
15 the receive envelope. The attenuation is the result of the ground entering the first Fresnel zone. Fresnel zone surround the direct ray path between the transmitter and receiver. The first Fresnel zone refers to the zone immediately surrounding the direct ray path. This zone is
20 defined in such a way that the path length of a ray which has been defracted between the transmitter and receiver is within half a wavelength of the path length of the direct ray. As the largest part of the signal power passes through the first Fresnel zone, any object, including the
25 ground, aligning within this zone will lead to attenuation

of the received signal. A compromise is therefore made when mounting the antennas. Usually at a Grand Prix circuit the track is surrounded by metal barriers, known as Armco, which is approximately 1 metre high or with fencing 5 which is approximately 3 metres high. Antennas are mounted half a metre above the Armco so that the RF Signal is not attenuated by being located near to the metal structure or the tyre wall in-front. Therefore, because the antennas are mounted by these track features, the most common 10 mounting heights for the antennas are 1.5 metres and 3 metres. The mounting requirements for each site are determined by reviewing the physical layout of the site at that point and determining limiting factors which may prevent optimum locations of each circuit or conducting an 15 on the spot circuit review.

Having determined the height of the antenna, the receive envelope, which lies between the outer limit of the antennas range (R_4 - see Figure 6) and the inner limit (R_1 , R_2) determined by the point at which signal drop out 20 occurs, can be determined. Having determined this receive envelope, it is necessary also to establish the amount of overlap with the receive envelope of the antenna of the adjacent station to ensure a smooth transition from using the signal from one station to using the signal from the 25 next station. Thus, a range R_3 corresponding to the point at which the signal from the adjacent antenna can no longer be received is chosen defining an overlap region between R_3 and R_4 .

In practice, in order to determine the layout of the stations around a track, the position of the first station (Rx1) is selected at the end of a long, for example, the Start/Finish straight (see Figure 7.1). The performance of this site is then established, the results of which enable the station previous (Rx 34) to the current station (Rx1), and the subsequent station (Rx2) to be located.

In Figure 7.1, Rx 1 is mounted at 3 metres high, therefore, using the reflection equation, the drop out point for the site will be 60 metres in front of the antenna. The operation of the system is based on an optimum overlap zone between the receive sites of 20 metres, this allows for fluctuation in vehicle position at the point at which the video is switched. If accurate position information is not available then the overlap zone can be increased to avoid the possibility of the signal being lost by switching from one receiver to the next too soon or too late. This 20 metres is added onto the drop out point and establishes the point on the track at which the subsequent station must be providing clean pictures (points A and B).

A line is then projected from the subsequent station pick up point on the inside of the track (point A), in the direction the cars travel, onto the perimeter fence at the maximum possible distance around the track. The projected line should provide a clean line of sight from the transmitter to the receiver and should therefore not cross any defining boundary lines such as perimeter fences,

buildings, trees or other structures. Once completed the process should be repeated to the point on the outside of the track (point B). As can be seen in Figure 7.1 the resulting site location may be different to that already
5 determined. It should also be noted that if the receive station was located at position A on the perimeter fence then a clean line of site to pick up point B could not be achieved because of the perimeter fence on the inside of Turn 2.

10 The location determined through this process then has to be evaluated for providing a clean line of sight for the duration of the planned receive envelope. Figure 7.1 indicates that location C on the perimeter fence is the maximum distance around the track at which a clear line of
15 sight to point C on the track could be obtained. This therefore implies that neither locations A or B are suitable for the receiver station. The final check is to ensure that location C still provides a clear line of site to the required pick up point. Once confirmed, then the
20 ideal geometrical location of the receive station can be fixed. The effect of the surrounding structures in causing the RF signal to be reflected into the receiver station must then be determined using the reflection equation.

The effect of the surrounding structures to cause
25 destructive reflections at receiver station RX1 must be established before the location of the preceding station (RX34) can be determined. Once the maximum pick up distance for receiver station RX1 has been established then

the preceding site must be located to have a drop out point 20 metres below the distance (to ensure the correct amount of overlap). In Figure 7.2 the preceding station to RX1 is shown as being mounted at 3 metres high and therefore must be located a further 60 metres below the drop out point. Figure 7.2 also indicates the procedure for locating the subsequent site to receiver station RX2.

Figures 7.3 and 7.4 indicate how the reflection equation is applied in a practical environment. It can be clearly seen in both figures that the receive antenna height (relative to the reflecting plane - in this case the fence) is a constant value. In Figure 7.3 the fence under investigation (FENCE 1) is parallel to the direction of travel and hence the height of the transmitter also remains at a constant distance. For Figure 7.3 the only variable becomes the transmission distance as the transmitting vehicle moves closer to the receive station. In Figure 7.4 it can be seen that the height of the transmit antenna will change as the transmission distance changes, therefore, two variables exist. Application of the reflection equation becomes more complicated when performing calculations relating to curved fences (as for example would be required in establishing the performance of receive station RX3 in the figures). In this case the height of the receive antenna relative to the fence would also change continuously as transmission distance changes, and therefore the equation includes three variables.

It should be noted that the drop out distances

produced by the reflection equation calculations can be very sensitive to small changes in antenna height relative to the reflective plane. For example, if the height of the transmitter was 4 metres and the height of the receiver 5 metres the first drop out point would occur at 333 metres (assuming the transmission frequency was 2.5 GHz). If the transmitter height was increased to 4.5 metres the first drop out point would become 375 metres. From this brief calculation it can be derived that if the vehicle follows a different path around the track, then the manner in which reflections from the surroundings affect the receiver station performance could vary greatly. It also indicates the importance of accurate location information to ensure theoretical system planning is as accurate as possible.

15 A further item to consider in the application of the reflection equation is the term relating to the RF signal wavelength and hence frequency. If, using the first example above, the frequency was lowered to 2.4 GHz then the first drop out point would occur at 320 metres, a difference of 13 metres. From this it can be derived that the set-up of the system would be different depending on the transmission frequency.

25 Having determined the theoretical locations for the receiver stations, using the appropriate RF equations, it is then also possible to consider the logistical implications of installing the stations. Factors such as position of perimeter openings, general accessibility, cable distances between receiver station and node, location

of advertising sign boards, location of structures to which antennas can be mounted, safety of site location.

For example, Figure 7.2 shows that receiver station RX34 is connected to Node 1 (N1). The cable run is about 5 40 metres which would be relatively quick to pull out, but there is a track access point just before the site, so a trench would need to be dug and the cable buried for protection of the cable and to keep the access way clear. The site could not be located just before the access point 10 because the stagger in the fence would block the antenna, therefore the receiver station could be moved back to approximately the same location as Node 1 making the cable run short and easy. The net result would be to increase the overlap with station RX1, but to reduce overlap with 15 station RX33. As this example indicates all important factors must be considered as early in the planning stage as possible, and where possible flexibility for minor adjustments should be built into the planning of the system.

20 The above method of sighting the receiver stations relates to stations provided with antennas having a narrow detection range (eg. 30°). However, these principles can be applied using antennas having a larger detection angle.

Each station comprises at least one receiver. Each 25 receiver may have its own dedicated antenna or the station may have a single antenna and a splitter for separating the various frequencies received and sending them to respective receivers. The stations also include filters and de-

modulators 4, for extracting the video signal from the received microwave transmission. The video signal may then be sent to the central controller as a baseband signal which includes the video picture information and the audio signals modulated onto separate sub-carriers.

Alternatively, the system may send the actual signal received by the antenna stations, i.e. the microwave signal, back to a central location where the receiver units and demodulator would be located. This type of system would require the RF signal to be modulated onto the fibre optic transport system, and each site would preferably have a dedicated fibre link back to the central location.

The antennas are preferably helix antennas but these may be replaced by any other type of suitable antenna (such as fan-beam antennas, patch antennas or omnidirectional antennas depending upon their location and the layout of the track. For example, an omnidirectional antenna may be used to cover a bend whilst a directional antenna is used for straighter sections. The directional antennas preferably have an angular range of between 30° and 120° depending on their location.

Whilst this invention has been described in relation to a racetrack location, it is clearly applicable to other applications. The system is equally applicable to a non-closed track e.g. for a road race. Furthermore, the system could be used in any situation where the transmission of video (or other high bandwidth signals) from a moving object to a stationary object is required. Applications

could include transmitting pictures from bicycles or cars (e.g. police cars) to roadside receivers for transmission to other police cars or a central control room. The system could even be extended to provide a mobile video communication system.

Whilst the above described embodiment refers primarily to the communication of video data, it is intended that the system may also provide communication of audio and data signals both to and from the car as well as video signals back to the car. Clearly, once a communication link is established, as described above, it is simply a matter of sending a signal to the car down the established link rather than receiving from it.

CLAIMS

1. A communication system including:
a video signal source and transmitter for transmitting
5 said video signal provided on a mobile object;
a plurality of receivers for receiving said
transmitted video signal and
control means for selectively receiving the
transmitted video signal received by one of said receivers
10 and outputting said selected signal.

2. A system according to claim 1 wherein the
receiver selected by the control means is based upon the
position of the mobile object.

15

3. A system according to claim 1 or 2 wherein the
receivers have a maximum range in which the signal from the
transmitter can be received at an acceptable level wherein
each receiver is arranged such that the range of the
20 receiver overlaps with the range of the adjacent receiver
or receivers.

4. A system according to any one of the preceding
claims, wherein the control means changes from receiving
25 the signal received by a first one of said receivers to a
second one of said receivers at a pre-determined distance
from the first receiver.

5. A system according to any one of the preceding

claims wherein the receivers have helix antennas.

6. A system according to claim 5 wherein the antennas are arranged at a height of between 1.5 and 3 5 metres relative to the ground.

7. A system according to any one of claims 1 to 5 wherein the transmitter can be controlled to transmit on one of a plurality of frequencies.

10

8. A system according to claim 7 wherein the transmission frequency of the transmitter is controlled by the control means.

15 9. A system according to any one of the preceding claims comprising one or more further mobile objects each provided with a transmitter, each transmitter simultaneously transmitting video signals to one or more of said receivers.

20

10. A system according to any one of the preceding claims wherein the receivers and the control means are all connected to a network.

25 11. The system according to claim 10 wherein the network comprises first and second signal lines, the output of each of the receivers being selectively connectable to the first, the second or neither of said signal lines such that, in use, the output from one of said

receivers is connected to the first signal line and the output of a second one of the receivers is connected to the second signal line, and wherein

5 said control means outputs the signal on the signal line connected to the receiver receiving the desired signal.

12. A system according to claim 11 wherein the control means includes a further output connected to the 10 signal line not connected to the desired receiver.

13. A method of communicating a video signal between a mobile object and a stationary location comprising transmitting the video signal from a transmitter on the 15 mobile object;

providing a plurality of receivers for receiving the signal from the transmitter at at least one receiver; and

outputting one of the signals received by said receivers at said stationary location.

20

14. A method of establishing a communication system for communicating a video signal between a mobile object provided with a transmitter for transmitting the video signal and a stationary location comprising providing a 25 plurality of receivers each having a detection area within which the receiver is able to receive the signal from the transmitter when the transmitter is in the detection area,

each receiver being arranged by placing a first receiver at a first location to define a first detection

area, then positioning each subsequent receiver at a distance from the previous receiver such that the detection area of the subsequent receiver overlaps with the detection area of the previous receiver to form a continuous strip
5 within which the signal from the transmitter is receivable by at least one of the receivers, and wherein the signal received by said at least one receiver is provided to said stationary location.

10 15. A method of establishing a communication system according to claim 14 wherein the position of each receiver is determined by:

determining a first zone of possible positions for the receiver based on a predetermined amount of overlap of the
15 detection areas of the current receiver and the previous receiver;

determining a subset of the first zone of possible locations for the receiver to determine a second zone of practical locations for mounting the receiver;

20 eliminating those locations in the second zone to define a third zone in which the detection area of the receiver does not cover all the required locations of the transmitter by considering the topology of the ground in the detection area of the receiver and any obstructions
25 therein; and

placing the receiver in the third zone.

16. A method according to claim 13, 14 or 15 wherein

the receiver providing the signal output at said stationary location is determined based upon the position of the mobile object.

5 17. A communication system substantially as described herein with reference to Figures 1 to 3 of the accompanying drawings.


10 18. A method of communicating a video signal substantially as described herein with reference to Figures 1 and 3 of the accompanying drawings.

ABSTRACT

The present invention provides a ground based video pick-up system for transmitting video signals produced on a moving object to one of a number of receivers at a fixed position and selecting the desired signal from the most appropriate one of those receivers.


THIS PAGE BLANK (USPTO)

FIG. 1

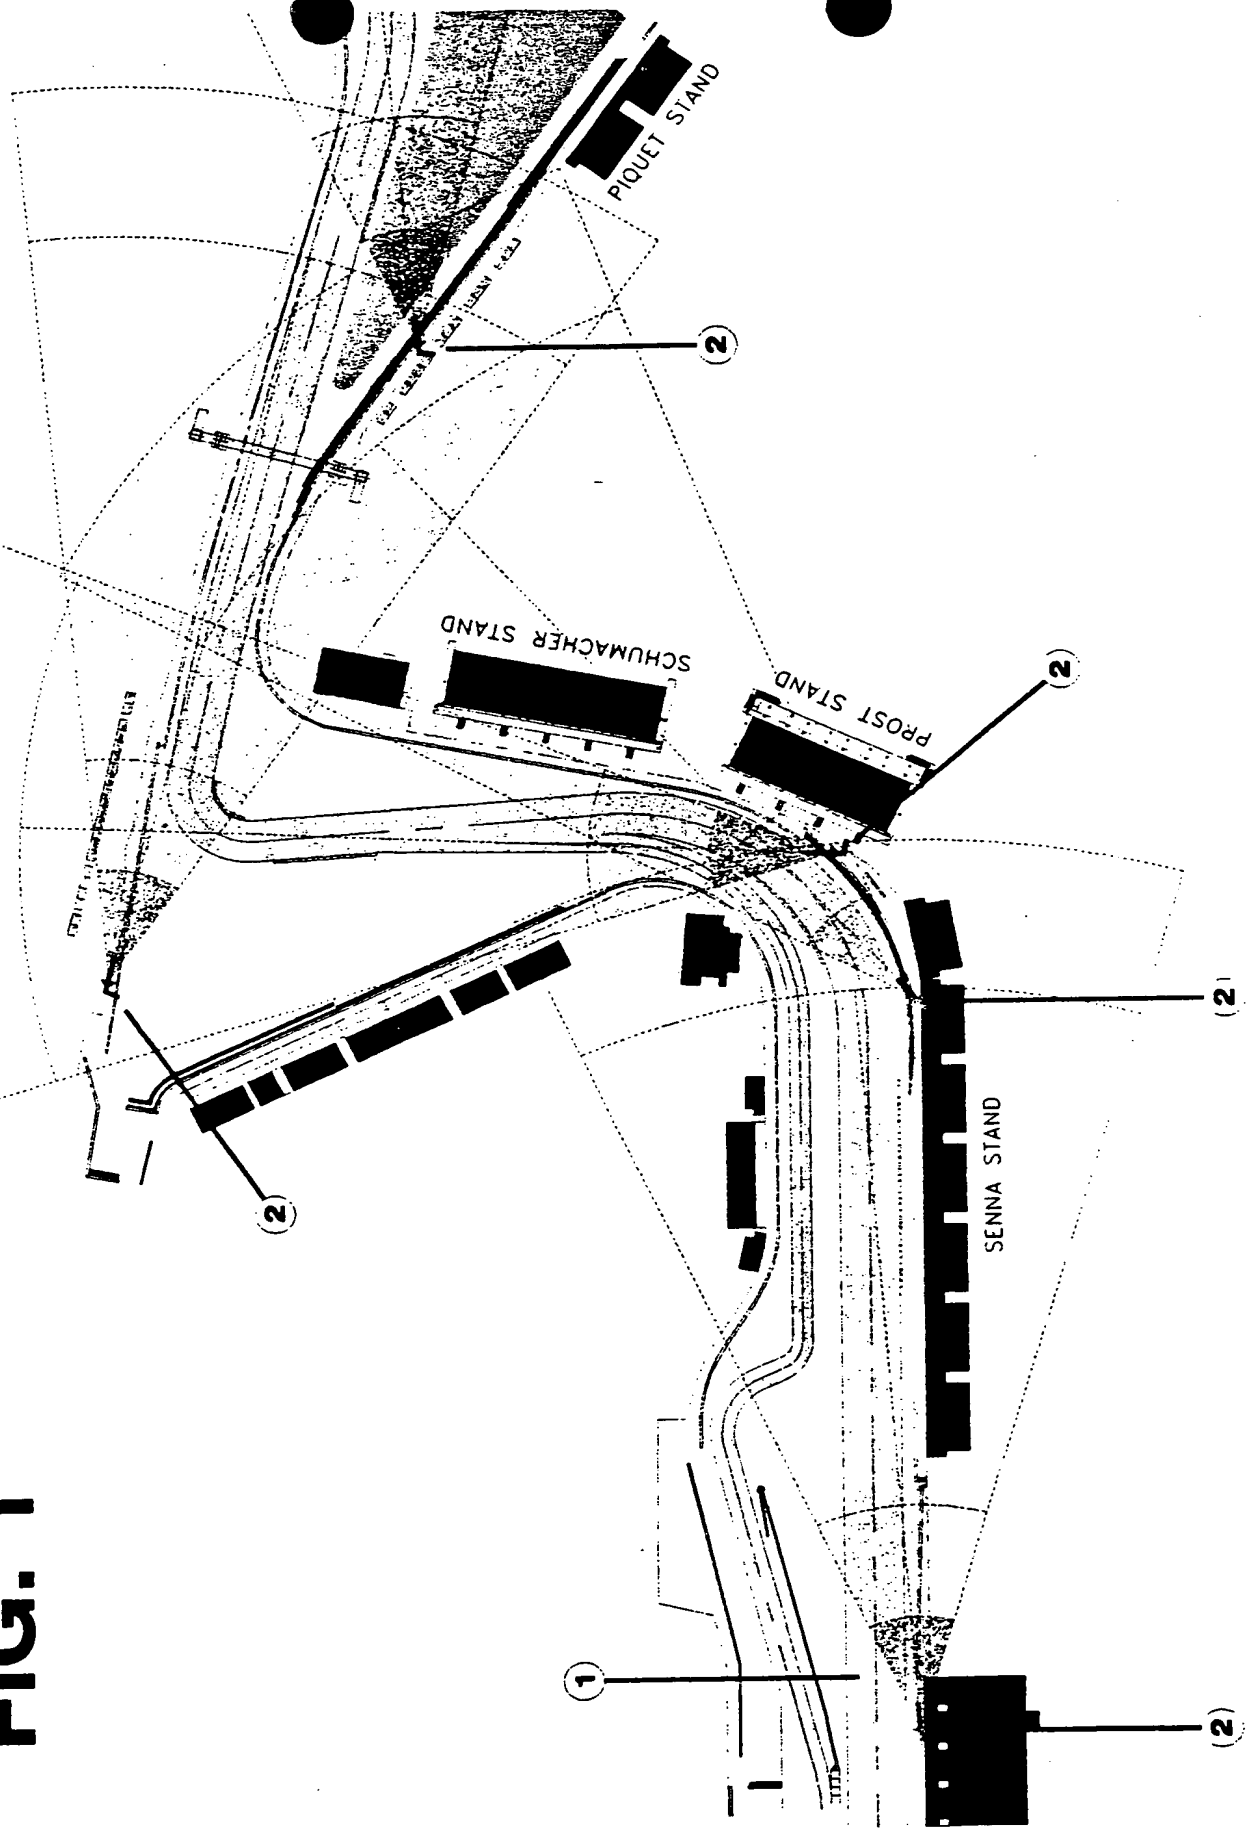

THIS PAGE BLANK (USPTO)


Figure 2:

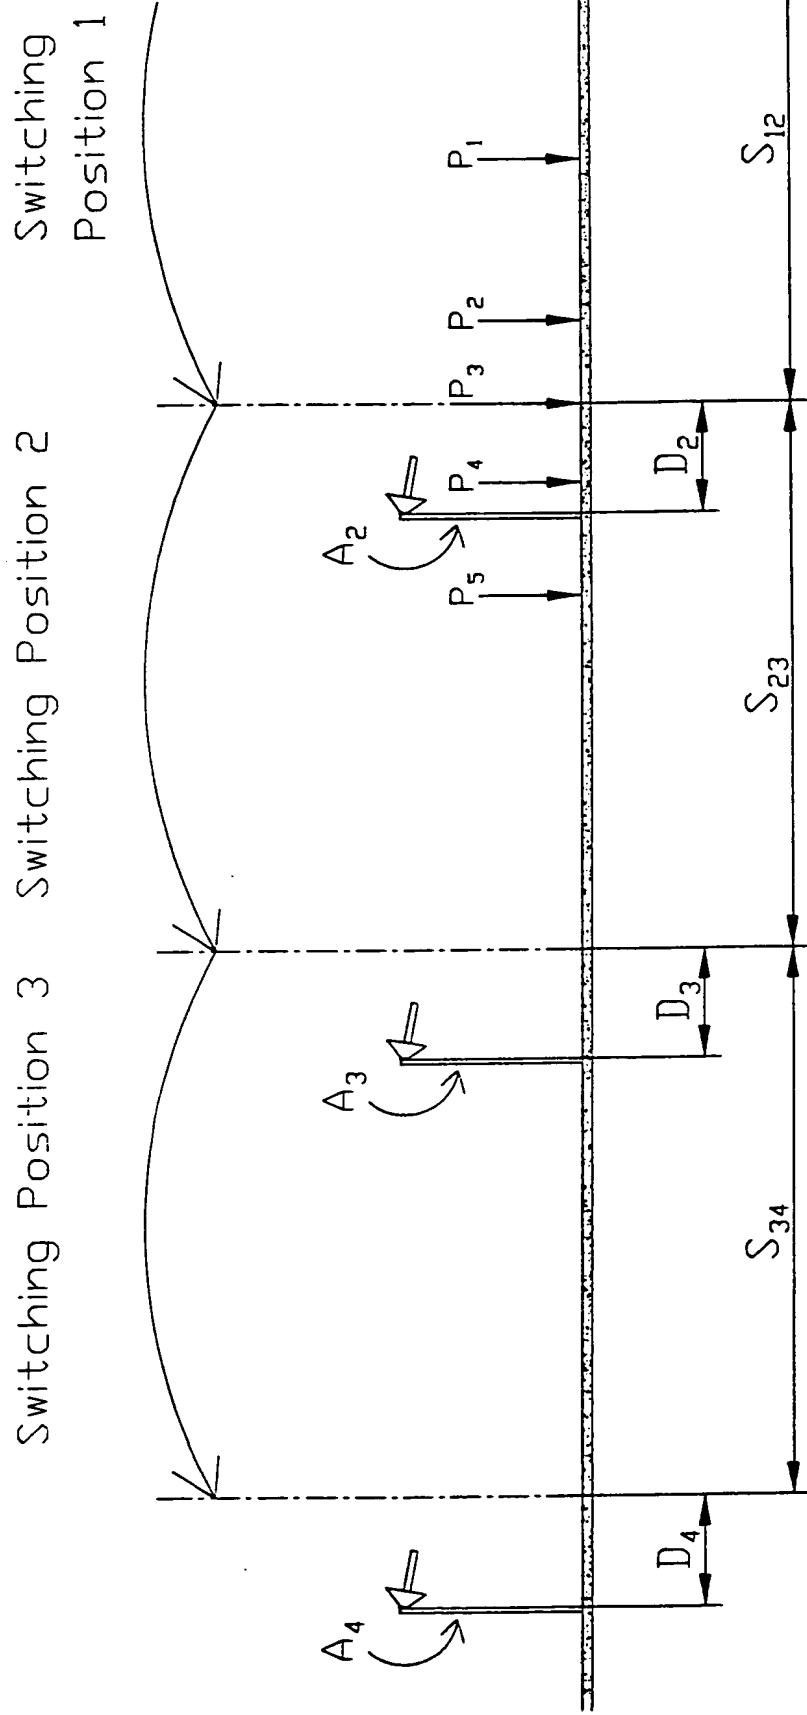

THIS PAGE BLANK (USPTO)


Figure 3:

Helix Antenna

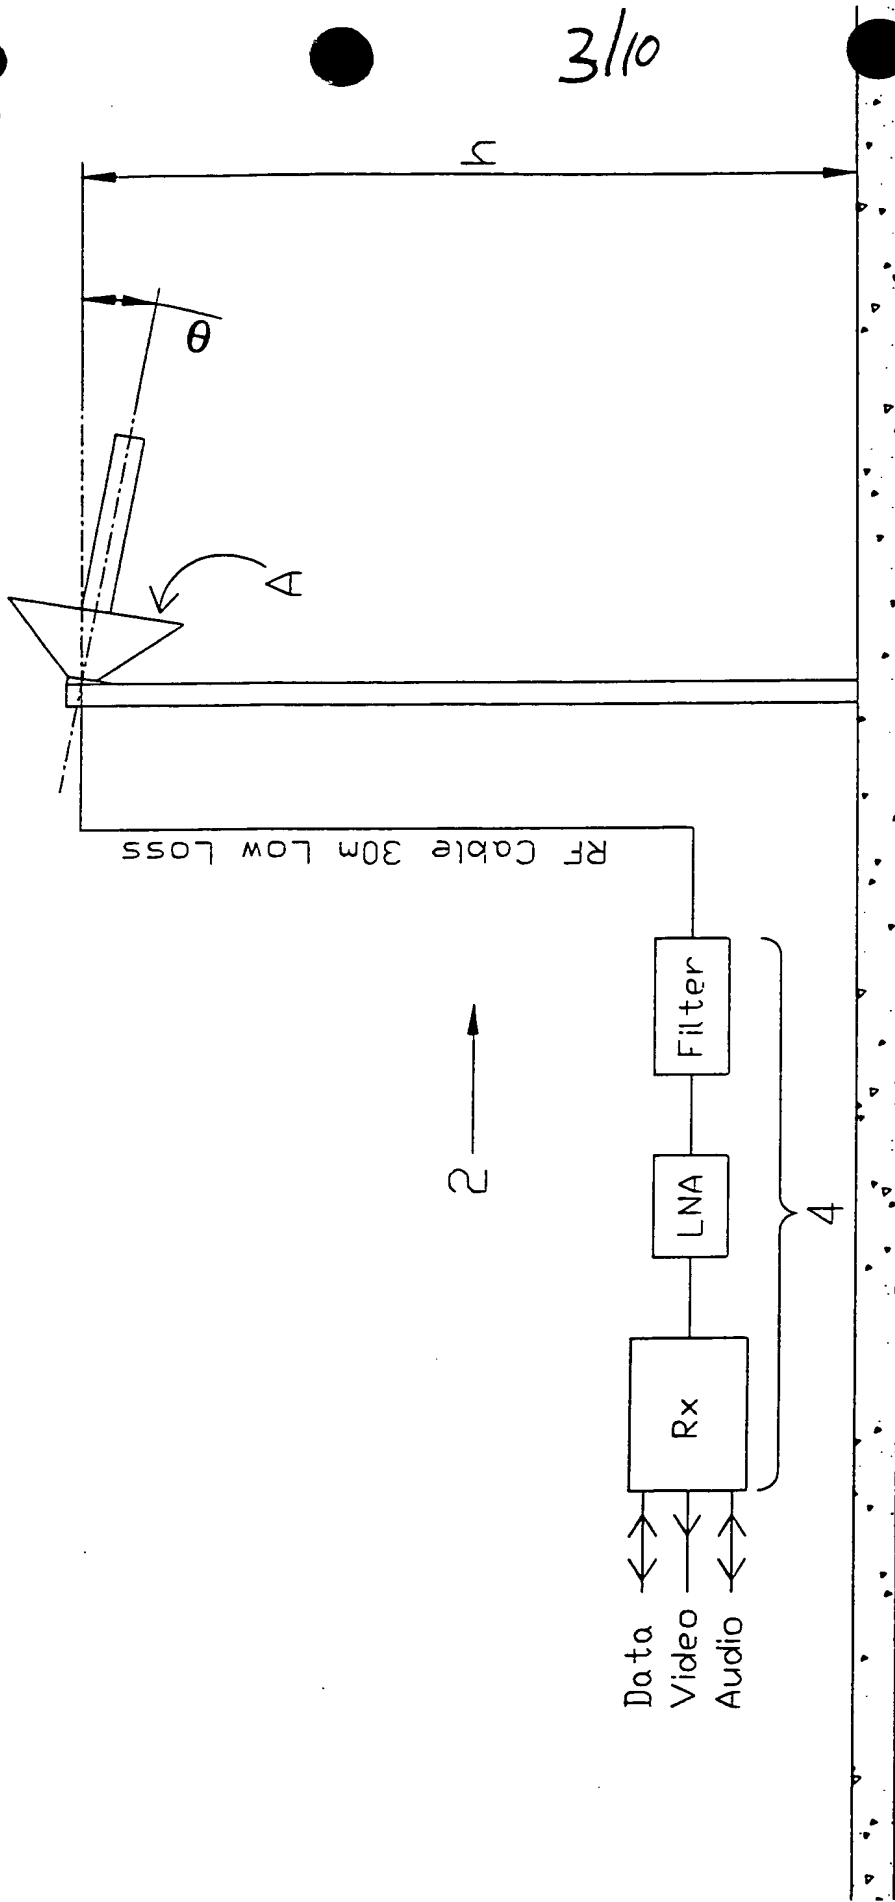

THIS PAGE BLANK (USPTO)

Figure 4:

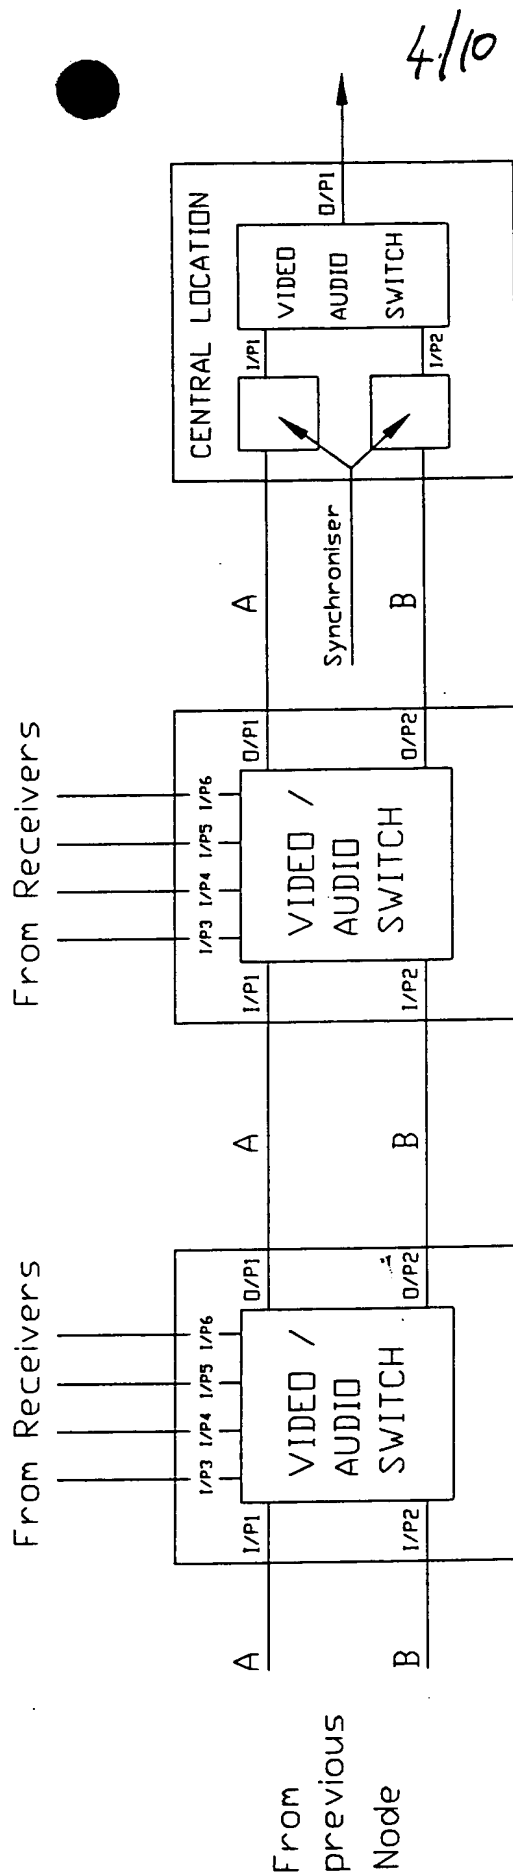

THIS PAGE BLANK (USPTO)



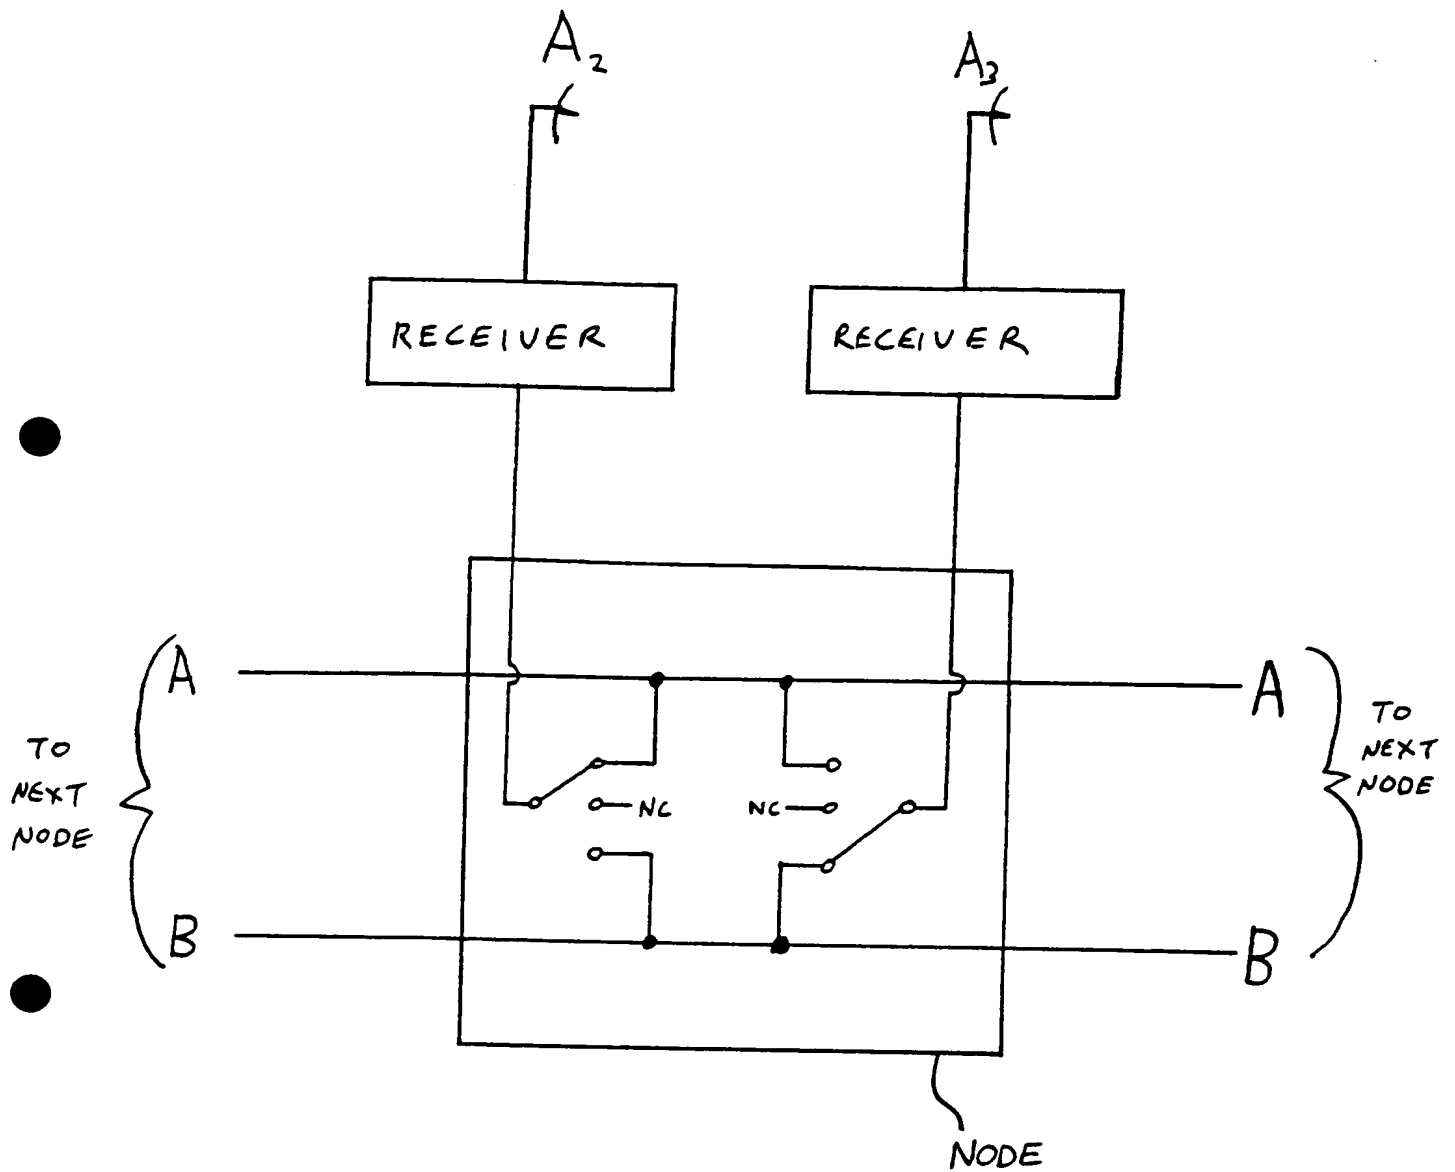



FIGURE 5.

THIS PAGE BLANK (USPTO)

6/10

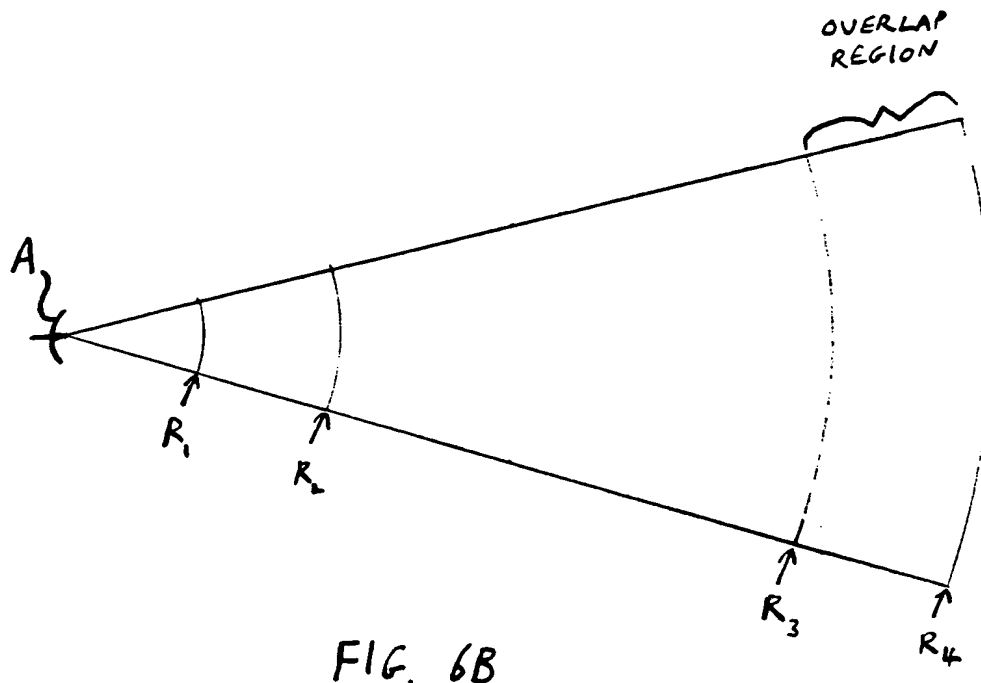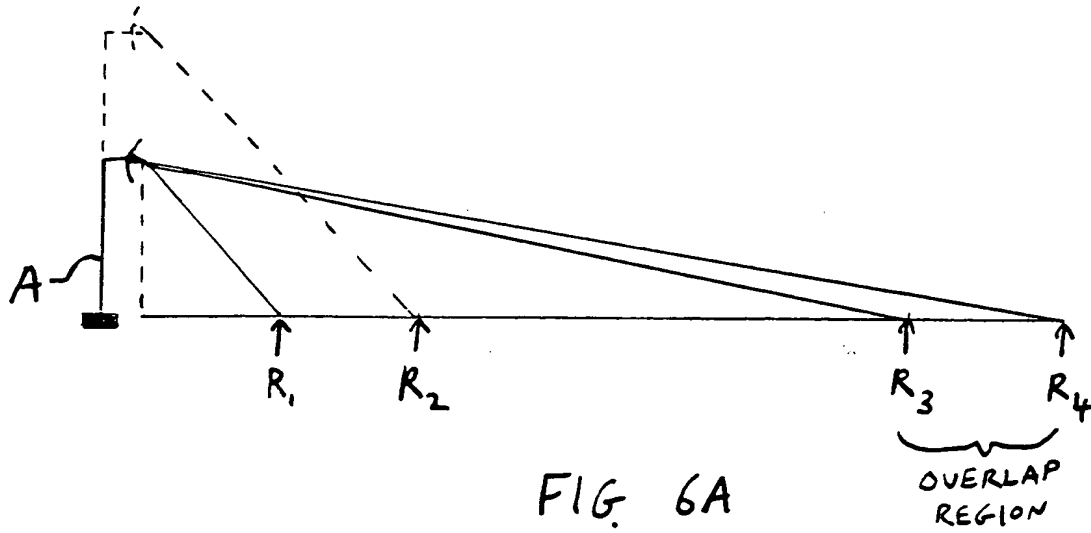


THIS PAGE BLANK (USPTO)

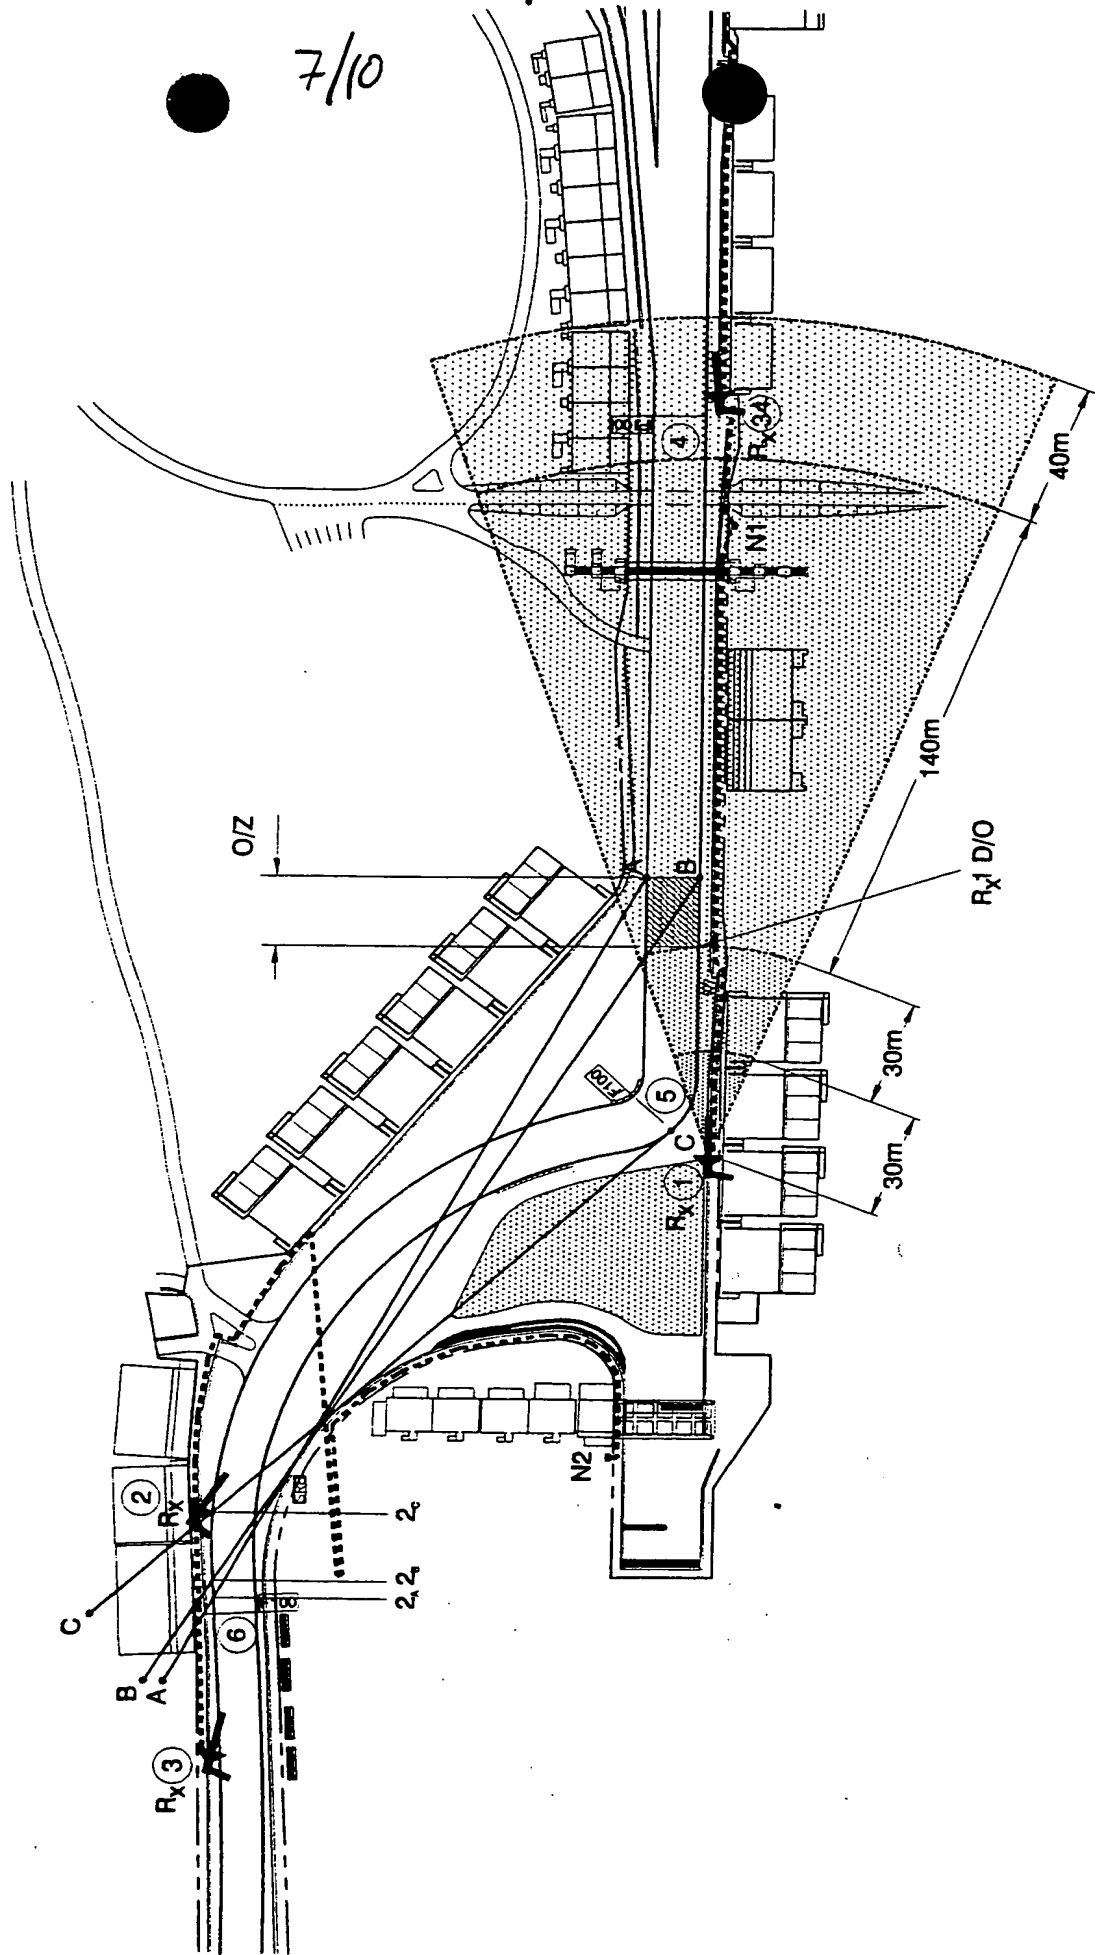


THIS PAGE BLANK (USPTO)

R34 D/O

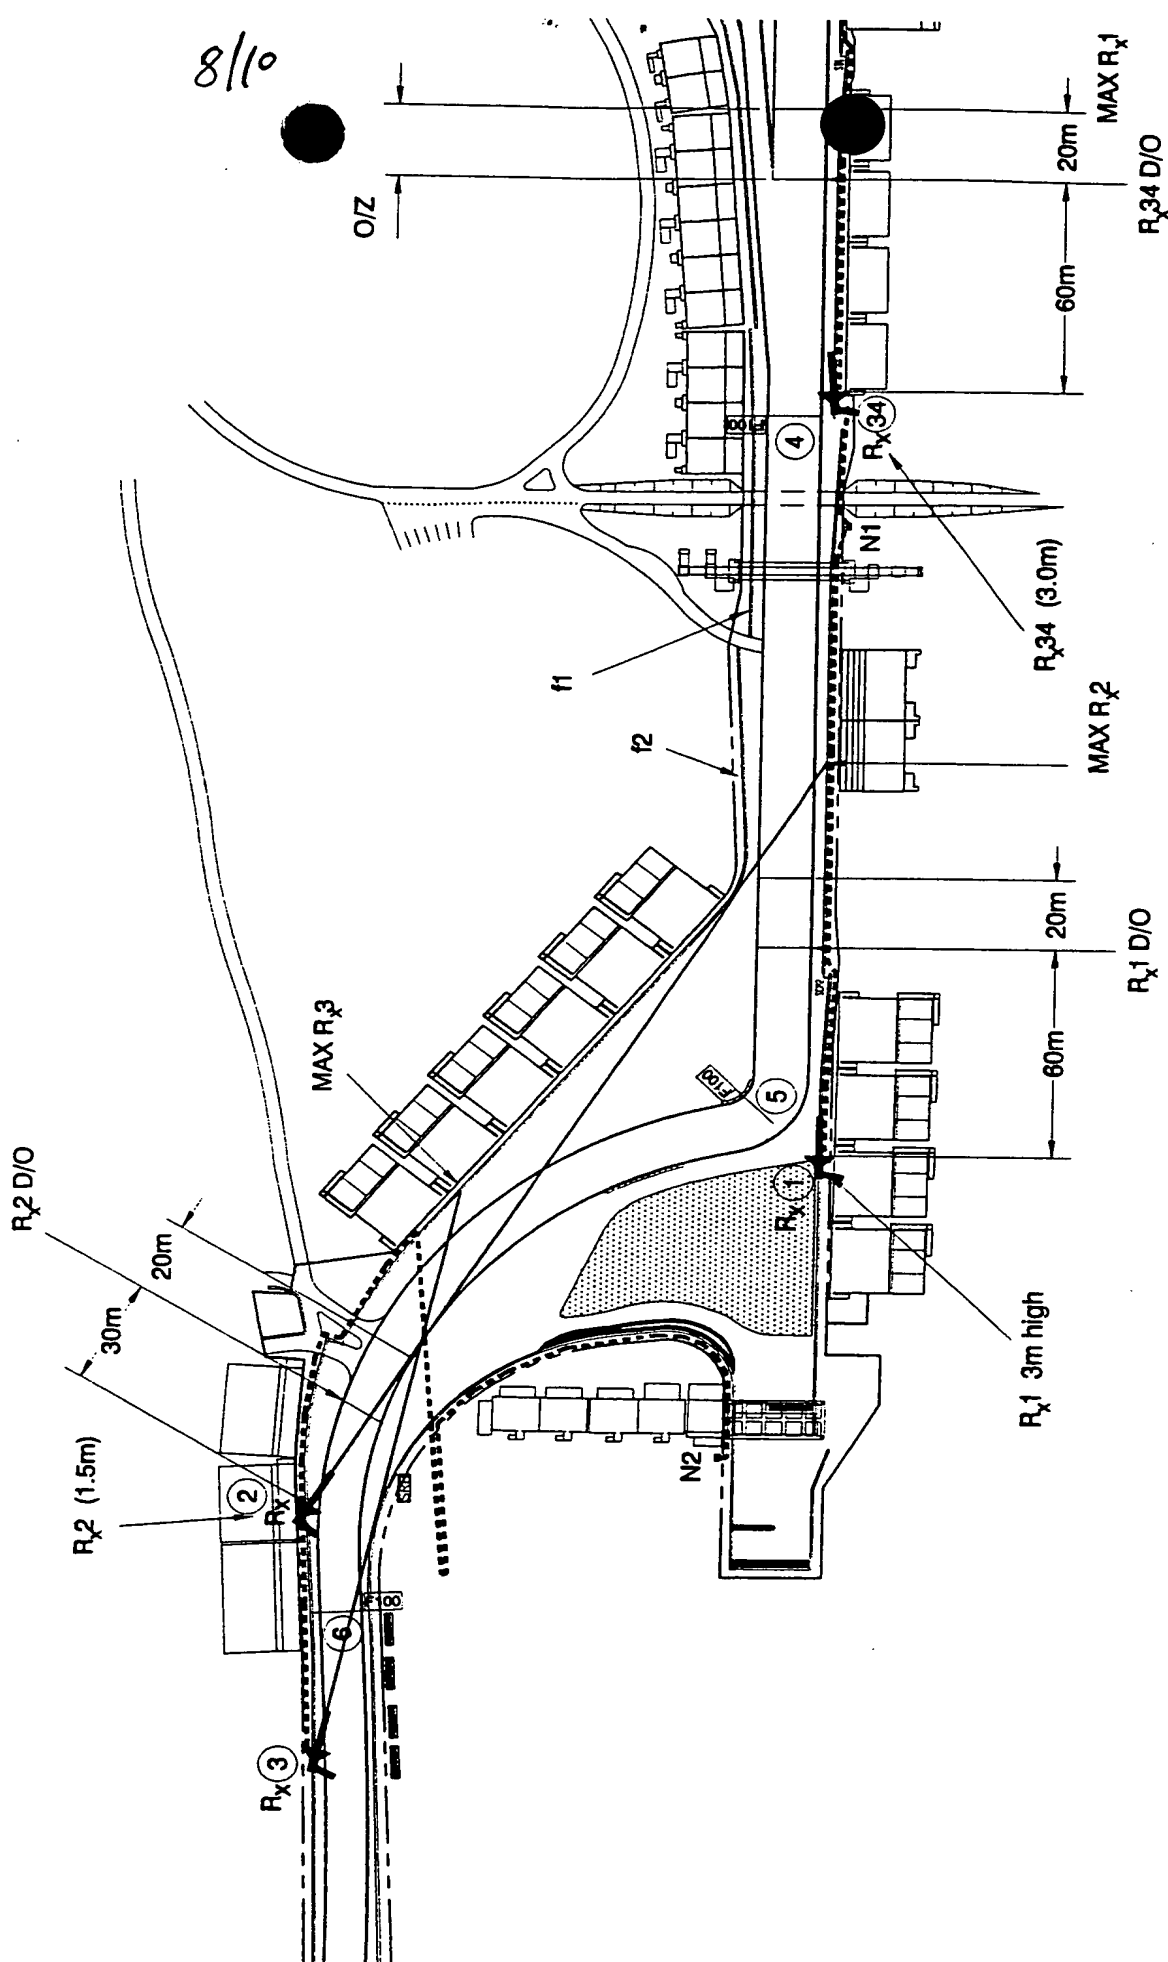


THIS PAGE BLANK (USPTO)

9/10

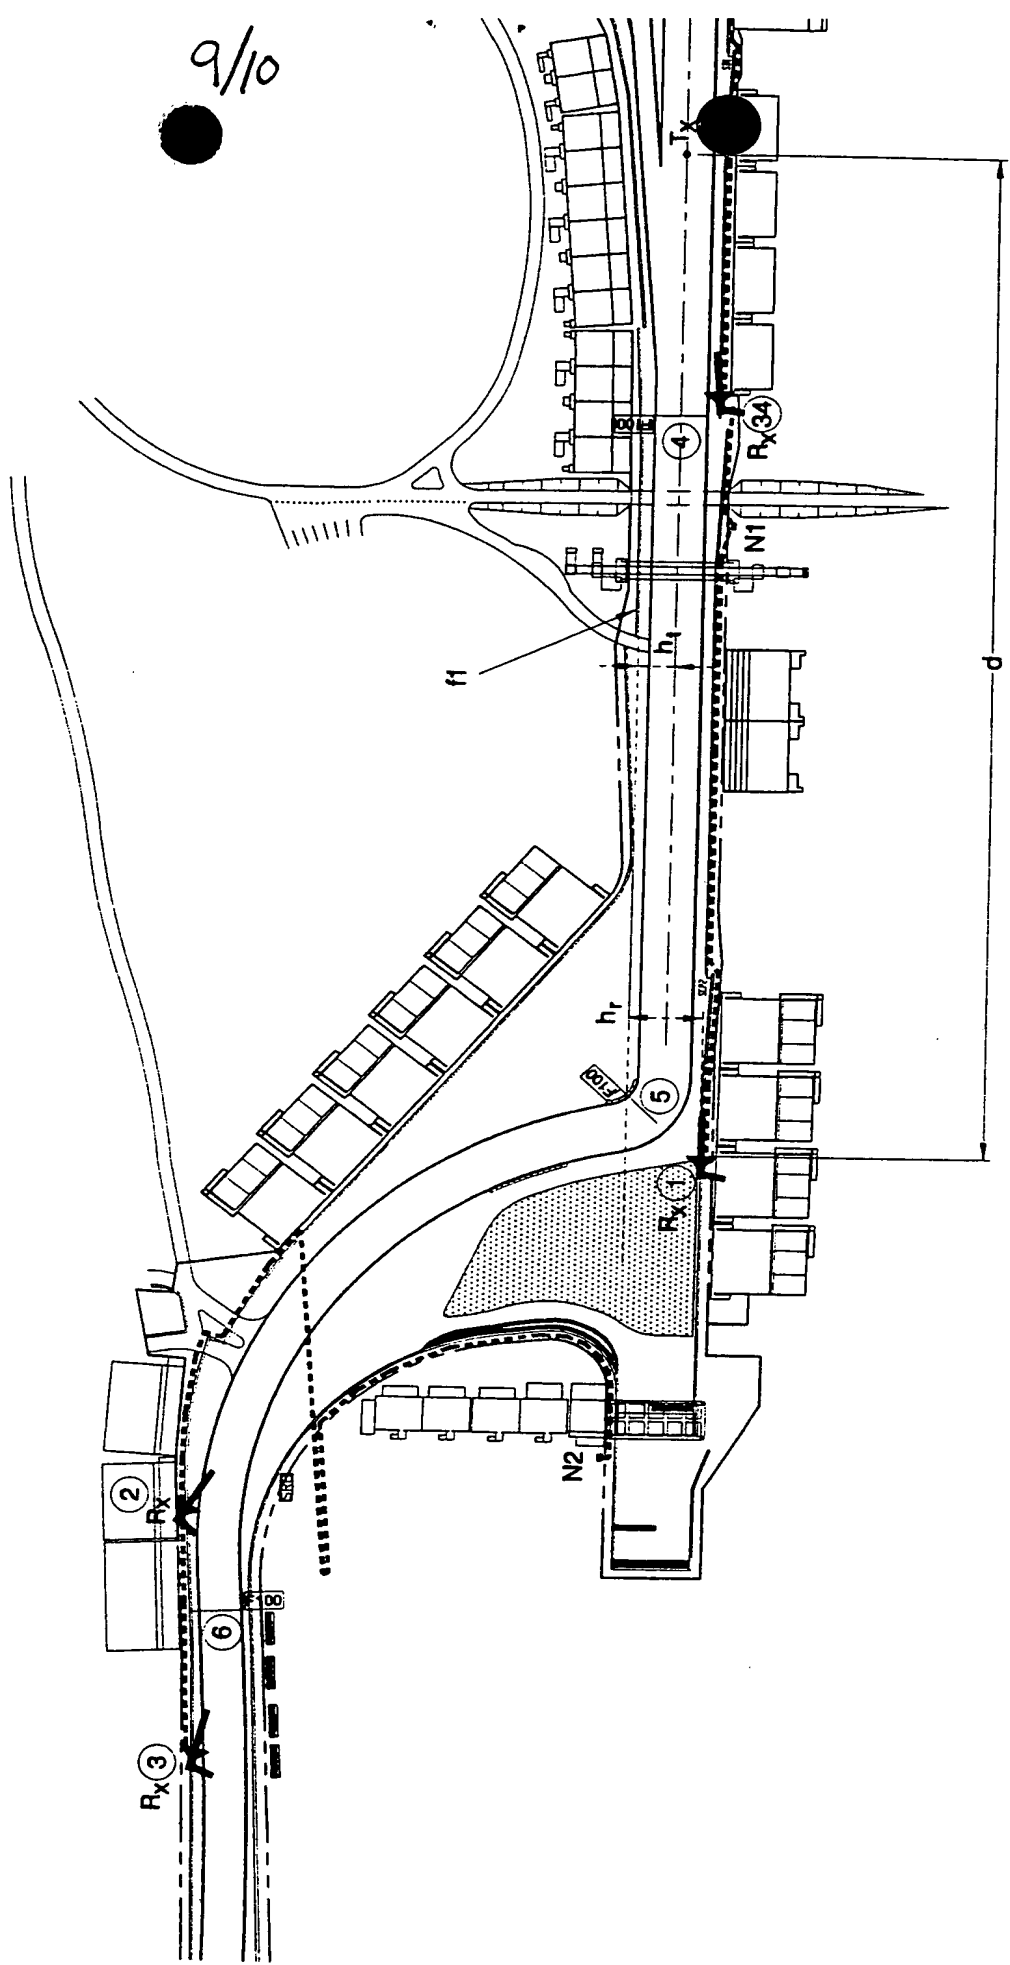

THIS PAGE BLANK (USPTO)

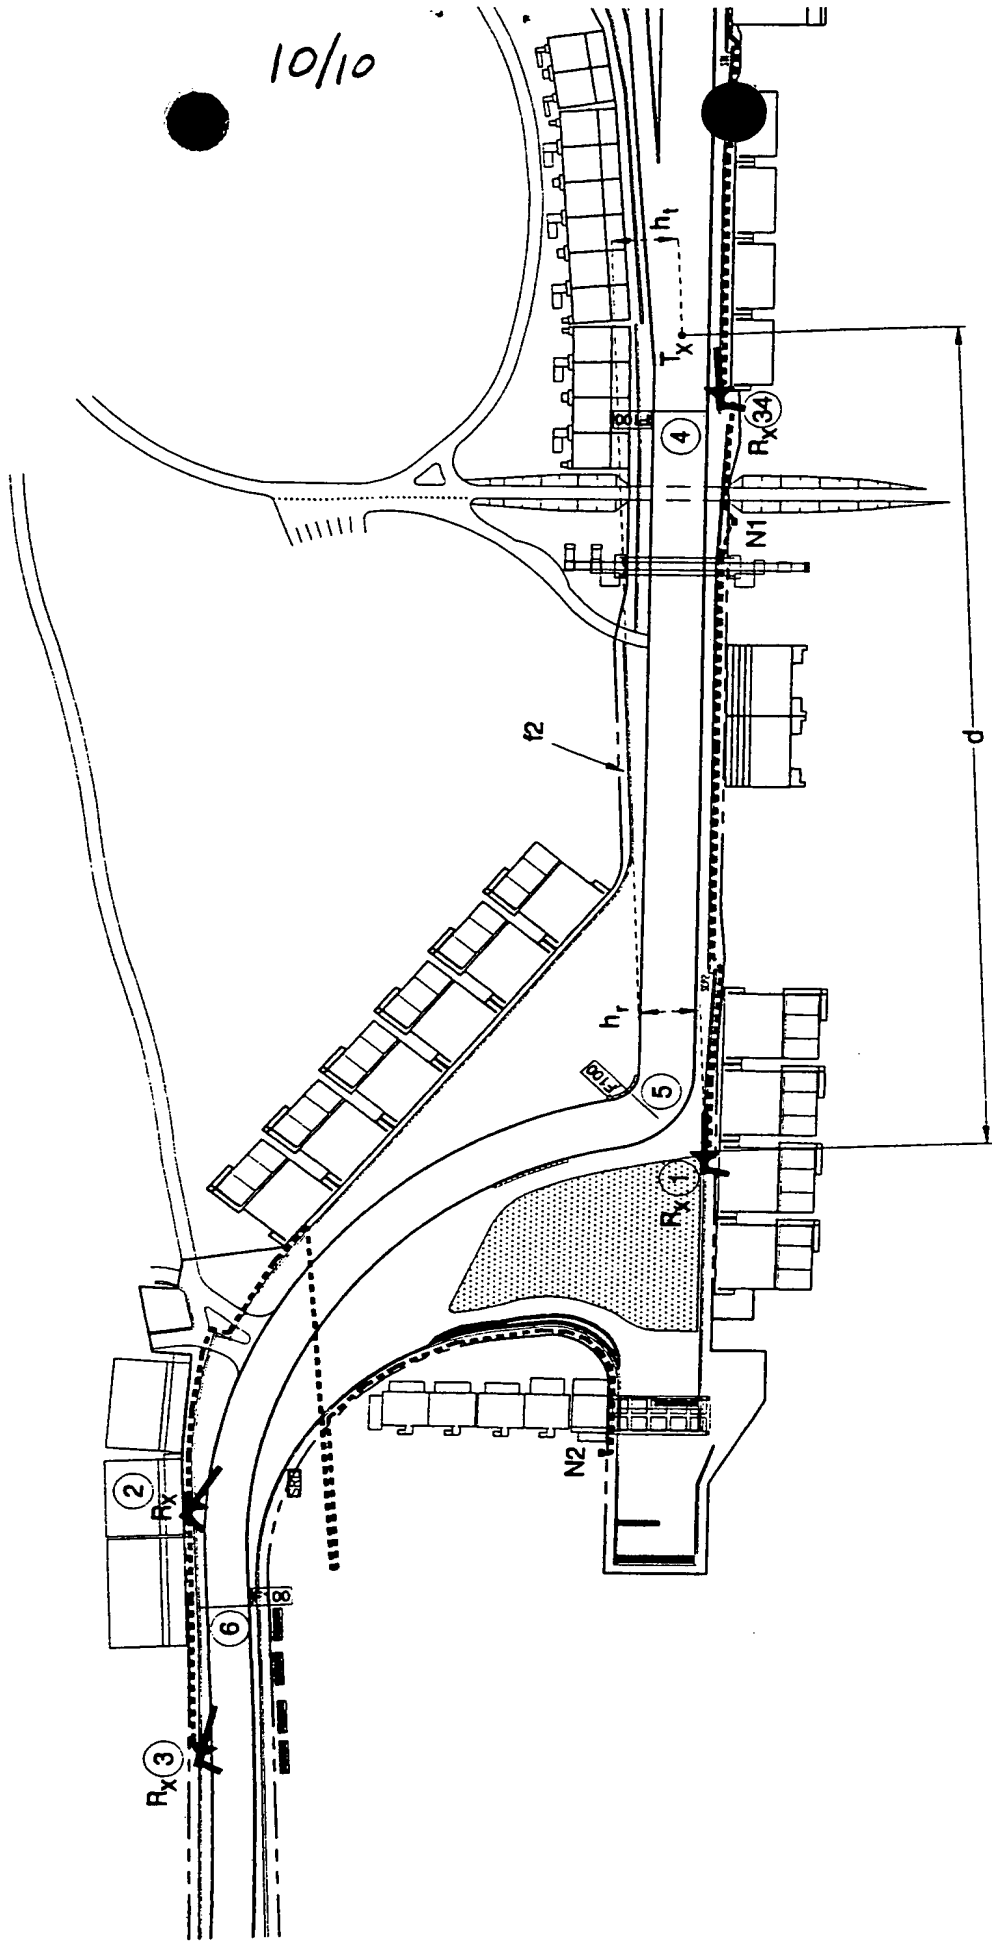

PCT/GB 01/00590

JA Kemp + Co, London
26/2/99

THIS PAGE BLANK (USPTO)